


RAPTOR®



RAPTOR 1K PRO PRIMER GREY

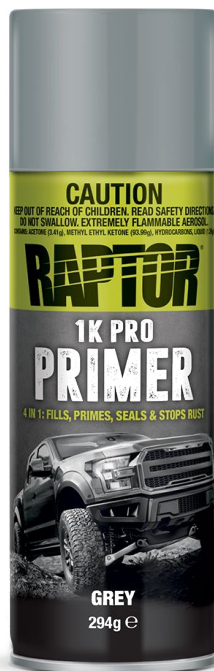

DESCRIPTION

A 1K high build, professional grade primer that combines 4 jobs in 1. It fills uneven surfaces, primes, seals, and stops rust. It's fast drying, easy to sand, and provides outstanding adhesion to a wide range of surfaces including properly prepared steel, aluminium and galvanised steel, as well as fibreglass and most plastics.









FEATURES

- 1K Pro Quality
- Fast Drying & Easy to Sand
- Clog Free Nozzle
- Excellent Adhesion to a Wide Range of Surfaces

TECHNICAL DATA SHEET

RAPTOR 1K PRO PRIMER GREY

Product preparation - application

	It is strongly recommended to use appropriate personal protection equipment during application to avoid respiratory, skin and eye irritation.		
	<p>Clean and degrease. Mask any areas as required. Direct To Metal sanded P180 - P240 and cleaned thoroughly Can be applied over sanded SMC, polyester bodyfillers and Fibreglass when abraded P180 - P240 and degreased, or lightly sanded E-Coat Most automotive exterior plastic parts. Thoroughly shake can for at least 2 mins before use. Always wear safety goggles and gloves before spraying. Use only outdoors or in a well-ventilated area.</p>		
	Ready to use		
	Not applicable		
		1 - 2 coats sprayed 15 - 25cm away from the object	with intermediate flash-off: 5 min - 10 min at 20°C depending on film build Sandable: 1 hr at 20°C depending on film build
		P400 - P600 P600 - P800	




VOC compliant

This product mix is out of scope for VOC directive

TECHNICAL DATA SHEET

RAPTOR 1K PRO PRIMER GREY

Products

	RPPG/AL RAPTOR® 1K PRO PRIMER GREY
	30 - 40 µm 2 coats
	RPPG/AL RAPTOR® 1K PRO PRIMER GREY can be overcoated with itself within 1 hours, without intermediate sanding
	After use, hold aerosol can upside down and spray briefly to clean nozzle. If the nozzle becomes blocked, remove from the can and soak in gentle thinners before replacing. Do not stick pins into the orifice.

Waste treatment	Dispose of contents and container in accordance with all local, regional, national and international regulations.
-----------------	---

Remarks

- Theoretical coverage 0.7m² per unit, assuming 100% transfer efficiency and at the indicated film build
- Aerosol cans should be stored for 2 hours at room temperature before use. For long term storage keep in a dry well ventilated area and away from direct sunlight and frost. Recommended storage temperature 5 - 25°C, recommended application temperature 20°C

Consult Safety Data Sheet prior to use. Observe the precautionary notices displayed on the container.

All other products referred to in the refinish build up are from our brand product range. System properties will not be valid when the related material is used in combination with any other materials or additives which are not part of our brand product range, unless explicitly indicated otherwise.

For professional use only! The information provided in this documentation has been carefully selected and arranged by us. It is based upon our best knowledge on the subject at the date of issuance. The Information is given for information purposes only. We are not liable for its correctness, accuracy and completeness. It is up to the user to check the information with regard to up-to-dateness and suitability for his intended purpose. The intellectual property in this Information, including patents, trademarks and copyrights, is protected. All rights reserved. The relevant Material Safety Data Sheet and Warnings displayed on the product label need to be observed. We may modify and/ or discontinue operation of all or portions of this Information at any time in our sole discretion, without notice and assume no responsibility to update the Information. All rules set forth in this clause shall apply accordingly for any future changes and amendments.