TOUGH PROTECTIVE COATINGS



HOW TO MIX WITH RAPTOR TRACTION SLIP RESISTANT ADDITIVE



POUR HARDENER

For the 4 Bottle Kit, pour hardener up to the measuring line in the mixing cup (240ml of hardener for 710ml of RAPTOR).



SHAKE

Shake your RAPTOR Bottle thoroughly.



POUR HARDENER AGAIN

Pour your hardener into the RAPTOR bottle.



ADD TRACTION

Add a full bag of RAPTOR Traction slip resistant additive to the RAPTOR bottle.




SHAKE AGAIN

Replace the lid on the bottle and shake for 2 mins.



APPLY RAPTOR

You are now ready to shoot RAPTOR.

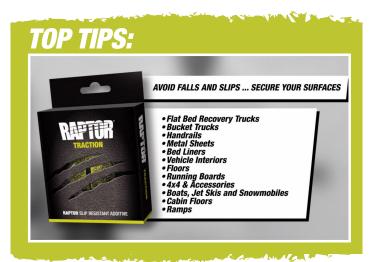

NOTES:

TRACTION SHOULD ONLY BE APPLIED WITH U-POLS SCHUTZ GUN (GUN/1) OR ROLLER.

ONLY USE RAPTOR WITH SOLVENT-BASED PAINT (WATER-BASED IS NOT COMPATIBLE). IF GOING TO A DISTRIBUTOR FOR COLOUR, MAKE SURE HE DOESN'T INCLUDE BINDER (FOR MAXIMUM PIGMENT STRENGTH). ALL KITS COME WITH THE CORRECT HARDENER TO RAPTOR RATIO, FOR CORRECT ACTIVATION. CORRECT MEASURING IS CRUCIAL. WE RECOMMEND TINTING OUT OF THE BOTTLE TO ENSURE THOROUGH MIXING.